


# N660H2

## Premium Dual PVR

### Digital Satellite Receiver

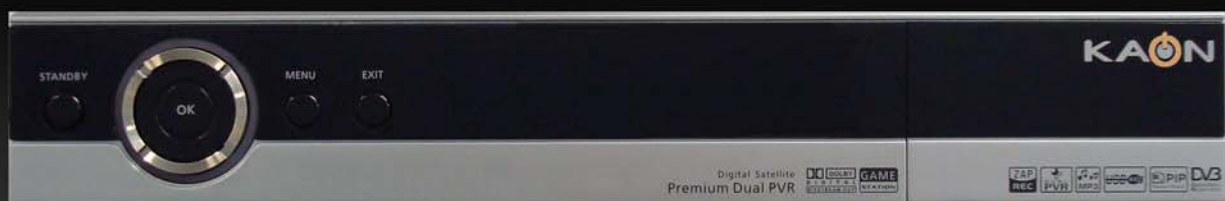

Dual Tuner

Simultaneous 2 Channel Record and 1 Playback

Time-Shifting

Grid EPG with now, Next and Full (7 Days)

Teletext

MP3(MPEG-1 Layer-3) Transfer and Play via USB2.0

PIP:Picture in Picture (Adjustable sizes and locations)

Games

USB2.0 support for fast transfer via PC

HDMI Output with upscaler

160GB HDD

# Premium Dual PVR

## Digital Satellite Receiver



### SPECIFICATIONS - MODEL KSC-N660H2

#### Tuner

|                 |                         |
|-----------------|-------------------------|
| Demodulation    | QPSK                    |
| FEC Modes Rate  | 1/2, 2/3, 3/4, 5/6, 7/8 |
| Input Connector | F type Female (75 Ohm)  |
| Frequency Range | 950 Mhz ~ 2150 Mhz      |
| Symbol Rate     | 2 ~ 45 Mbaud            |

#### RF Modulator

|                 |  |
|-----------------|--|
| PLL type        | CH 21-69 for the modulation            |
| TV Standard     | PAL B/G, I, SECAM L, NTSC M selectable |
| RF Connector    | 75 Ohms, 169-2, Male/Female            |
| Frequency Range | UHF: 470 ~ 860Mhz                      |

#### MPEG TS A/V Decoder

|                  |                          |
|------------------|--------------------------|
| Video Resolution | 720 x 576                |
| Input Bit Rate   | Max. 90Mbit/s            |
| Transport Stream | MPEG-2 ISO/IEC 13818-1   |
| Audio Decoding   | MPEG/Musicam Layer 1 & 2 |
| Audio Mode       | Single / Dual Channel    |

#### A/V & Data Input/Output

|         |  |
|---------|--|
| Video   | HDMI, RCA/Cinch, Video Output(CVBS)<br>/SCART(CVBS, RGB)S-VIDEO Out  |
| Audio   | RCA/CINCH Volume & Mute Control<br>(Resolution: 20 bits DAC, Max 2Vrms)<br>S/PDIF of Dolby Digital Bitstream Out |
| RS-232C | Transfer Rate 115Kbps, 9 PIN D-Sub Type  |
| USB     | 2.0 Device   |

#### System Resources

|                    |           |
|--------------------|-----------|
| Flash Memory       | 4 Mbytes  |
| SDRAM              | 64 Mbytes |
| Main CPU MPEG Chip | µPD61130  |

#### Power Supply

|                   |                        |
|-------------------|------------------------|
| Input Voltage     | AC 90-250V, 50/60Hz    |
| Power Consumption | 45W                    |
| Protection        | Separate Internal Fuse |
| Type              | SMPS                   |

#### Physical Specification

|                       |                |
|-----------------------|----------------|
| Size (W x H x D)      | 340 x 60 x 250 |
| Net Weight            | 3kg            |
| Operating Temperature | 0°C ~ 50°C     |
| Storage Temperature   | -20°C ~ -60°C  |

#### Option Function

|                  |                           |
|------------------|---------------------------|
| Common Interface | 2 DVB -Ci Slots           |
| PVR              | HDD 160 GB                |
| SW Upload        | RS232C (Optional Via OTA) |

#### Accessories

|               |
|---------------|
| Remote        |
| AV Cables     |
| 1 x USB Cable |
| Batteries     |
| User Manual   |

#### Warranty

12 Months

Manufactured by:

**KAON**  
www.kaonmedia.net

Imported and Distributed in New Zealand by:

**ASoft**

**ASoft Limited**

43 Joseph Banks Drive, Whitby, Porirua, New Zealand  
Phone: +64 4 234 1096 Fax: +64 4 234 1098  
Email: info@asoft.co.nz Web: www.asoft.co.nz/kaon/